



HANDLERS

www.industrialmanipulators.in



INTELLIGENT DEVICES FOR HANDLING



G R O U P
Scaglia
1838

INDEVA[®]

INTELLIGENT DEVICES FOR HANDLING

Scaglia Indeva

A worldwide network at your service

A reliable Company with a long history

G R O U P
Scaglia
1838

The ant is a tireless and intelligent worker. It is able to lift and carry with ease loads much larger than itself. This simple analogy represents Scaglia Indeva's mission to design and produce industrial manipulators that are compact yet strong, simple yet intelligent, and offer improved performance whilst reducing the risk of injury and improving workforce wellbeing.

A world-leading manufacturing company in the field of material handling and intra-logistics.

Since 1838 this family-owned company has been at the forefront of manufacturing and is now an important industrial group with diverse business interests worldwide.

Since 1970 Scaglia Indeva has been at the leading edge of design and manufacture of innovative, ergonomically designed industrial manipulators that are used by major global manufacturers in varied applications throughout the world.

World-wide, Indeva® works with many blue-chip manufacturers across most sectors, including the leading automotive companies, where innovative and reliable material handling solutions are required. Our key locations offer a central sales and support operation, which provides excellent engineering services and supply of spare parts.



ITALY



GERMANY



FRANCE



UNITED STATES



P.R. OF CHINA



UNITED KINGDOM



SWEDEN





References

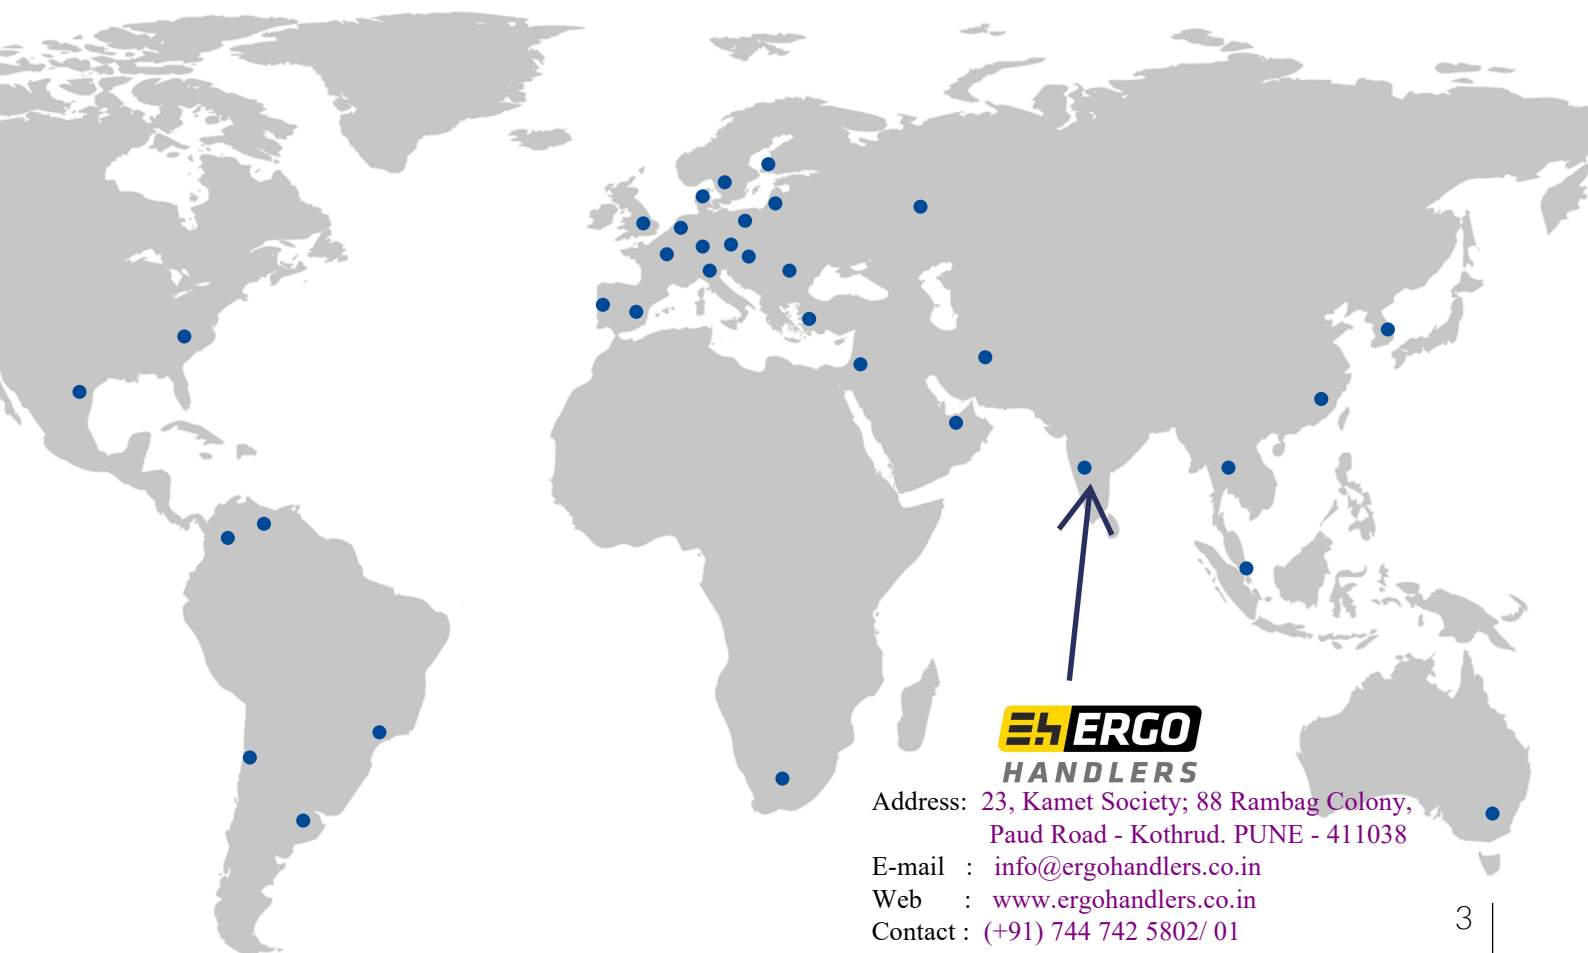


ABB
AIRBUS
AKZO FIBERS
APRILIA
ARCELOR MITTAL
AUDI
B.P. CHEMICALS
BANK OF ENGLAND
BANQUE DE FRANCE
BARILLA
BEKAERT
BENTELER
BENTLEY
BMW
BORG WARNER
BOSCH
BREMBO
BRIDGESTONE FIRESTONE
BRITISH AMERICAN TOBACCO
CATERPILLAR
CHRYSLER
CIBA GEIGY
CITROËN
COCA COLA
COMAU
CONTINENTAL
CPM-DÜRR GROUP
DAIKIN

DAIMLER
DENSO
DUCATI
DUNLOP
ELECTROLUX
ENICHEM
FAURECIA
FCA
FERRARI
FERRERO
FIAT
FINMECCANICA
FORD
FRESENIUS
GE AUTOMATION
GE AVIATION

GENERAL ELECTRIC
GENERAL MOTORS
GLAXO
GOODYEAR
ITALTEL
IVECO
JAGUAR LAND ROVER
JOHN DEERE
JOHNSON & JOHNSON
JSB
KELLOGGS
KIMBERLY CLARK
KRAFT GENERAL FOODS
KUKA
LAMBORGHINI
LEAR
LEONARDO HELICOPTERS
MAGNA WERKZEUGTECHNIK
MAHLE
MAN ROLAND DRUCKMASCHINEN
MERCEDES BENZ
MICHELIN
MOËT & CHANDON
NESTLÉ
NISSAN
OPEL
PEPSICO
PERFETTI

PEUGEOT
PHILIP MORRIS
PIAGGIO
PIRELLI
PPG
PROCTER & GAMBLE
PSA
RENAULT
REYNOLDS TOBACCO
ROLLS-ROYCE
SAAB
SAINT GOBAIN
SCANIA
SCHNEIDER ELECTRIC
SIEMENS
STILL
TENARIS
THYSSEN
TOYOTA
UNIFI
UNIROYAL
VALEO
VOLKSWAGEN
VOLVO
WHIRLPOOL
ZF



EH ERGO
HANDLERS

Address: 23, Kamet Society; 88 Rambag Colony,
Paud Road - Kothrud. PUNE - 411038

E-mail : info@ergohandlers.co.in

Web : www.ergohandlers.co.in

Contact : (+91) 744 742 5802/ 01

Scaglia Indeva

Intelligent Material Handling Technology

The **Liftronic® Series, known as INDEVA®** is a new generation of advanced industrial manipulators featuring electronic control. They represent the evolution from traditional manipulators and are part of the innovative product group of load handling devices known as **Intelligent Assist Devices**.

This series is equipped with an **advanced electronic control system** which overcomes the control limitations of pneumatic manipulators. They provide truly ergonomic and effortless handling.

The INDEVA® Liftronic® series offers numerous **important and unique advantages over a traditional pneumatic manipulator**, especially the **auto-weight sense and auto balancing** features:

- **Higher productivity:** using an INDEVA®, output can be maintained throughout a full shift giving increased productivity and operator wellbeing.
- **Better ergonomics:** a fingertip-sensitive handle allows for the lifting or lowering of heavy loads by simply touching the handle with a finger. Very little human effort is required during any part of the lift, place and lower process.
- **Higher precision:** with considerably more speed and precision than a traditional pneumatic manipulator, an INDEVA® allows for unsurpassed precision, where the operator will intuitively work at the pace best suited to the task. The operator has exceptional control with the lightest of touch needed.
- **User friendly:** the **auto weight sensing** and **auto balancing** functions operate in real time, so no need to pre-set the load or to keep buttons depressed. The **Float Mode** option allows the operator to control movement directly from the load.
- **Safety:** state-of-the-art safety features prevent movement unless an operator is present and in control. Should a power failure occur, the motor is held with a mechanical lock and the load cannot be released until power is restored, or the full weight of the load is supported.
- **Wireless connectivity for industry 4.0:** an INDEVA® can exchange data with the Customer IT System through the Company Network and allows visualisation of manipulator activity by means of interface software.
- **Remote trouble shooting:** an INDEVA® can be connected via Wi-Fi to **App Indeva**, so that machine data can be transferred to a remote tablet or smartphone in real time. This can assist fault diagnosis, so significantly reducing call-out charges and operator downtime.
- **Environment friendly:** low carbon foot print thanks to efficient and low energy consumption.

In applications which require speed of handling, smooth movement and precise load placement, the INDEVAs-Liftronic® Series provide a perfect solution.



A recent case study by the Engineering Faculty of the Brescia University and published by the International Journal of Industrial Ergonomics, together with a comparison study carried out by the University of Milan proved how the use of an INDEVA® satisfies current industry demand for increased productivity combined with improved ergonomics and safety.





EASY MAINTENANCE

Optimised modular structure with easy access to all components.

Z AXIS CONTROL

It is possible to limit the stroke on the Z axis to suit the specific restrictions of each application.

QUICK DIAGNOSTIC

Comprehensive auto - diagnostic software with clearly displayed error messages.

FORCE SENSING HANDLE

It allows fingertip control providing immediate response to the operator's intention for up-down movements.

STATE-OF-THE-ART SAFETY DEVICES

Electronic control allows for additional safety functions that cannot be incorporated in pneumatic manipulators.

WIRELESS CONNECTIVITY AND REMOTE TROUBLE SHOOTING

Industry 4.0 ready.

ANTI-TANGLE- SWIVEL JOINT

Air and electrical connections are via a swivel on top of the tool head. This prevents the lift rope, power cable and air pipe becoming tangled if the process has continuous rotation in the same direction.

FINE SPEED CONTROL

An INDEVA® moves at the pace best suited to the operator and application. This allows natural movement at all times, especially where precise placement is required. It is also possible to limit the lift and lower speed via the control panel.

CAPACITY OVERLOAD

The maximum permitted lift can be preset to prevent system overload.

FLOAT MODE

This control mode allows the operator to manipulate the load without direct contact with the controls.

LOAD PLACEMENT PRECISION

The system allows very slow and controlled movements, so that a load can be precisely placed with no impact, so reducing the risk of damage.

Scaglia Indeva

Manipulators range


Liftronic® Series

Intelligent
Devices for
Handling

Electronic control

The Liftronic® Series Intelligent Devices for Handling, known as INDEVA®, represent true evolution of traditional industrial manipulators.

State-of-the-art standardised components, combined with cutting-edge technology, hardware and optimised software provide a **high degree of safety and reliability.**

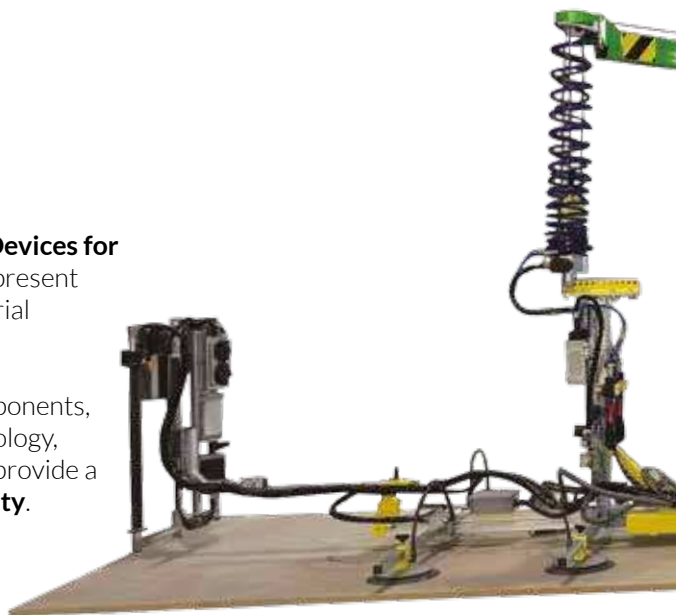

Automatic weight
sensing in real time.

**AUTO-WEIGHT
SENSE**

No weight sensing.

Automatic weight
balancing **in real time**
allowing **variable**
weights to be handled
without presetting
load.

**AUTO
BALANCING**

Weight balancing is **not**
automatic or real time.
Pre-set weights via
selector switch.

Moves as fast or as slow as
the operator decides using
fingertip control with
minimal effort and instant
response.

RESPONSIVENESS

System response
is slower and feels
heavier because of this,
especially with upward
movement.


PN Series

Traditional
Industrial
Manipulators

Pneumatic control

PN series manipulators are traditional industrial manipulators featuring pneumatic control and drive.

All manipulators in the PN Series can be designed in accordance with **ATEX regulations** as per EU Directives 2014/34 regarding applications in controlled environments with danger of explosion, classified classes 1 and 2 (Gas) (only for PN Flex) and 21 and 22 – Dust (for all PN series models).

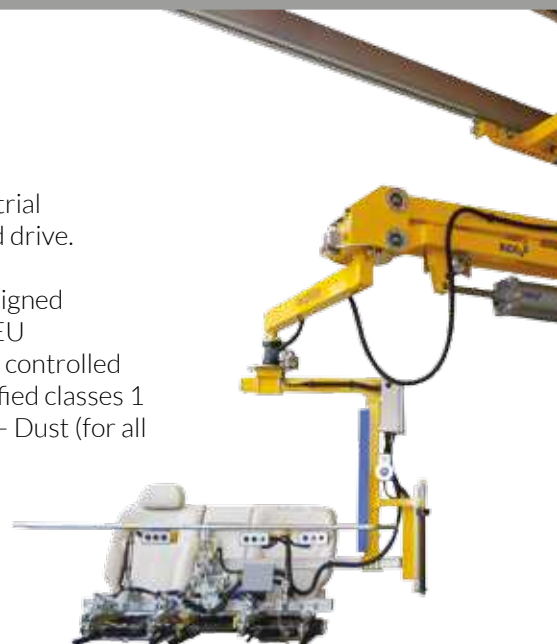



Rope

Liftronic® Easy

Capacity up to 320kg.
Suitable for **rapid** and **repetitive** work cycles with **simple** gripping tools.

Liftronic® Pro

Capacity up to 320kg.
Suitable for **complex** work cycles with **bespoke** gripping systems.



Rigid arm

Liftronic® Air

Capacity up to 310kg for standard models and 450 kg for special applications.
Suitable for handling **offset** loads with speed and precision.

Precise and coordinated with fine adjustment allowing accurate placement so reducing the risk of damage.

Lower: a comparative study showed that the CO² output and total running cost of an INDEVA® is around only 12,5% that of a pneumatic manipulator.

Light and compact structure allows **great visibility and ease of maneuverability**.

Comprehensive auto - diagnostic software and remote trouble shooting with App-Indeva or INDEVA® Gateway.

Simple and efficient: by means of display.

LOAD PLACEMENT

Some resistance is felt as air enters and leaves the cylinders so restricting natural speed of movement.

CARBON FOOTPRINT & TOTAL COST OF OPERATION

Higher: a comparative study showed that the CO² output and total running cost of a pneumatic manipulator is around 8 times that of an INDEVA®.

MANEUVERABILITY

System requires heavier and bulkier structure so reducing visibility and maneuverability.

DIAGNOSTIC & REMOTE TROUBLE SHOOTING

Check and diagnosis by expert technician attending site. Remote trouble shooting is **not available**.

MAN / MACHINE INTERFACE

Restricted options to identify faults at the machine.



Rope

PN Flex

Capacity up to 160kg.

PN Ergo

Capacity up to 310kg. for standard models and 450 kg for special applications.
Suitable for handling **offset** loads.

PN Compatto

Capacity up to 100kg.
Suitable for handling **offset** loads in a small work area.

Rigid arm

PN Zip

Capacity up to 80kg.
Very compact structure suitable when a **short vertical stroke** is required.

Liftronic® Easy

Intelligent Device for Handling

Liftronic® Easy is an INDEVA® - Intelligent Device for Handling.
Suitable for rapid and repetitive work cycles with **simple gripping tools**.

Main features

- Auto-weight sense and auto-balancing
- Can be integrated with App-Indeva and INDEVA® Gateway
- Unparalleled safety
- Ergonomic design
- Simple gripping devices
- Compact and light
- Fast, responsive and precise
- Low carbon footprint

INDEVA® Gripping tools



Scissor



Linear



Compact



Expanding Chuck

TECHNICAL DATA

Max. gross capacity: from 80 to 320kg
(weight of lifting tool included)
Power supply: 110/230 V-AC - 50/60 Hz
Power consumption: max 700 VA
Enclosure protection: 54 IP
Vertical stroke: up to 2.80m



INDEVA® Modulo

Make your own gripping tool

Liftronic® Series

INDEVA® Modulo is a standard component range for assembling a gripping tool which is to be attached to a Liftronic® Easy tool head.

It is easy for customers to design the tool to best suit their needs and then purchase the necessary parts.

These standardised modules have been proven over many years and are a key part of our continuous improvement and development program.

Control Module

Standard I.O.
Interface module




Gripping Modules

These chucks can be fitted with jaws according to your specific requirements



Compact
pantograph

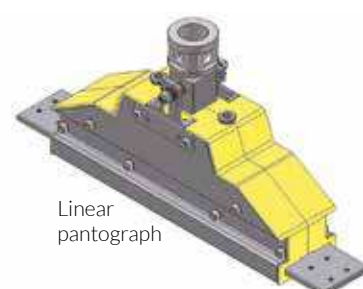

Linear
pantograph



Scissor
pantograph

Machine/Operator Interfaces



Remote controls



Remote touch
sensitive handle available
in different lengths



Remote control handles
complete with centre of
gravity adjustment



Simple remote
handle frame

Accessories



Air and electric connections
via a continuous swivel joint
at the toolhead to keep cables
from tangling.



Liftronic® Pro

Intelligent Device for Handling

Liftronic Pro is an INDEVA® - Intelligent Device for Handling.
It is used for **complex applications with bespoke gripping systems**.

Main features

- Auto-weight sense and auto-balancing
- Can be integrated with App-Indeva and INDEVA® Gateway
- Unparalleled safety
- Ergonomic design
- Bespoke gripping devices
- Compact and light
- Fast, responsive and precise
- Low carbon footprint

INDEVA® Gripping tools




TECHNICAL DATA

Max. gross capacity: from 80 to 320kg
(weight of lifting tool included)
Power supply: 110/230 V-AC - 50/60 Hz
Power consumption: max 700 VA
Vertical stroke: up to 2.80m




CUSTOMER
IT
SYSTEM

WIFI COMPANY
NETWORK

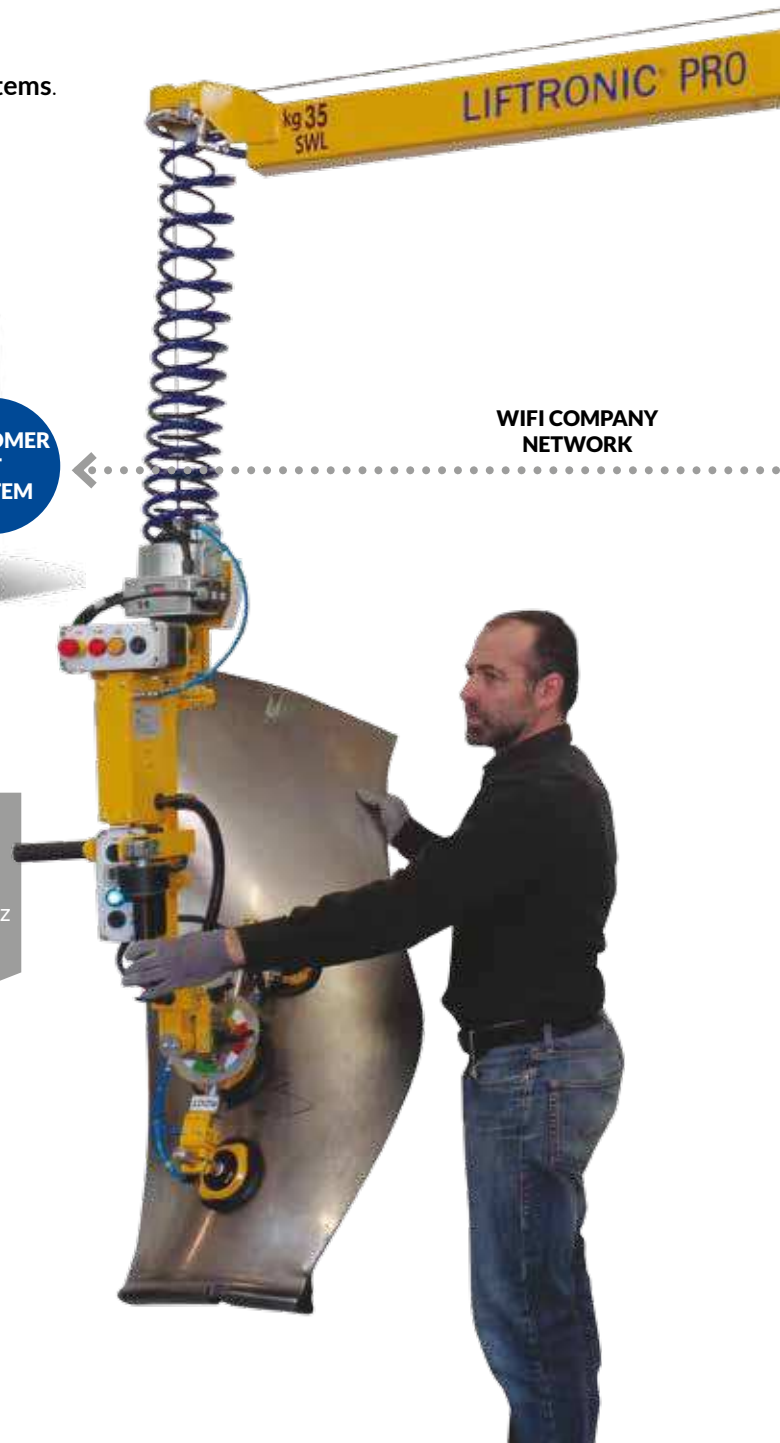

App-Indeva and INDEVA® Gateway Wi-Fi Network Connectivity

Liftronic® Series

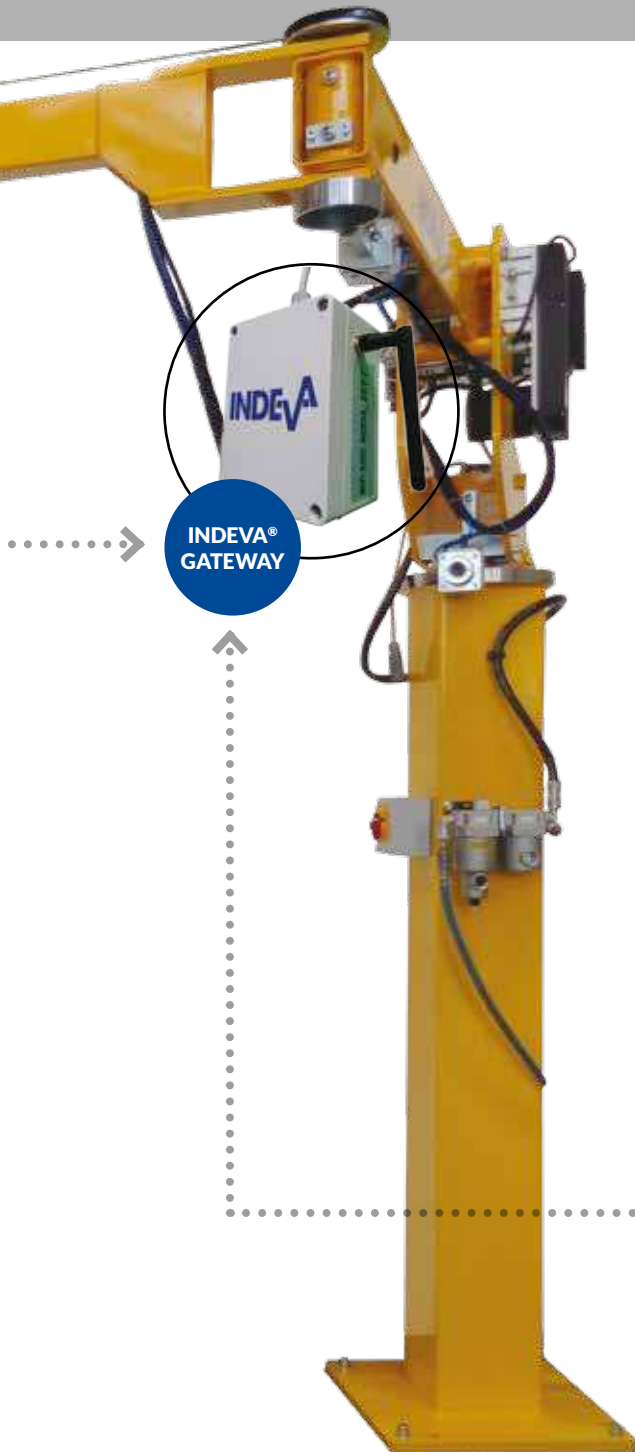

Industry 4.0 ready

App-Indeva

is a virtual INDEVA® service engineer always at your site providing machine data capture and analysis, diagnostic and real time trouble shooting whenever it is needed.

App-Indeva, is based on an in-house designed App suitable for Android smartphone or tablet that can be connected via Wi-Fi to the lift assistor, features **Real-Time Capability to collect and analyse machine data** and deliver the results to the operator, maintenance technician or a **remote Indeva Service Centre**.

If you are using an INDEVA® manipulator equipped **with App-Indeva you will increase your machine availability time** through:

- reduced time for diagnosis and trouble shooting by your staff
- reduced time for communication with an INDEVA® service centre
- reduced time for malfunction repair by INDEVA® staff

INDEVA® Gateway

allows **real time data exchange** with the Customer IT System through the Company Wi-Fi network and allows visualisation of production data by means of an interface software.

Options for all Liftronic® Series units

INDEVA

APP-
INDEVA




Liftronic® Pro & Easy Versions

Articulated Arms

2 JOINT ARMS

Standard arms featuring 2 joint articulation.

STRUCTURE	R1 (m)	2.5	3	3.5	4	4.5
L= Light	LC kg R2 (mm)	80 450	60 550	40 650	- -	- -
H= Heavy	LC kg R2 (mm)	260 630	190 760	140 880	105 1020	78 1140
X= Extra	LC kg R2 (mm)	- -	320 860	320 1005	280 1150	220 1300

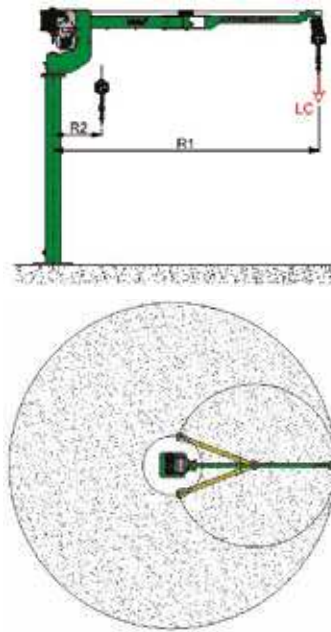

Column + arm



Fixed to floor



Fixed to a base platform




Fixed to a Pillar

3 JOINT ARMS

The INDEVA® Orbit Arm3 is a 3 joint arm available on request for both column and overhead versions with capacities up to 145 kg (including tooling). The 3 joint Arm provides **increased coverage** within the radius of the arm and offers the operator smooth, controllable movement across the full radius with the added benefit of **quick sideways movement** using the forearm only.

STRUCTURE	R1 (m)	2.75	3.25	3.75	4.25	4.5
L= Light	LC kg R2 (mm)	- -	- -	- -	- -	- -
H= Heavy	LC kg R2 (mm)	145 250	105 250	80 250	55 250	45 250
X= Extra	LC kg R2 (mm)	- -	- -	- -	- -	- -

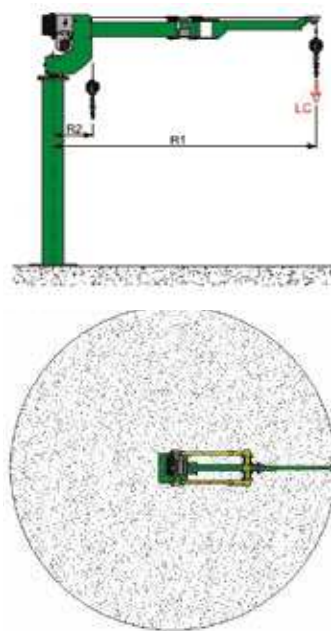

Overhead Arm



Fixed to ceiling



Underhung

Liftruck



Order picker



Transpallet

Linear



Fixed to floor/base



Underhung


Overhead rail



Bridge crane fixed to ceiling



Bridge crane column mounted



Monorail fixed to ceiling



Liftronic® Air

Intelligent Device for Handling

Pneumatic drive - electronic control

The world's first manipulator with the strength of a traditional pneumatic manipulator and the intelligence of an INDEVA®.

It offers electronically controlled air and load management, delivering precise, energy efficient handling and auto weight sensing, removing the responsibility from the operator to make adjustments for different weights by utilising our touch sensitive handle technology.

It is suitable for handling offset and/or very heavy loads with minimum effort.

Liftronic® Air units can be supplied either column, ceiling or overhead rail mounted.

Compared to traditional pneumatically controlled manipulators, Liftronic® Air offers important advantages which help **improve safety, ergonomics, productivity and the Environment.**

Main features

- Efficient use and delivery of air
- Auto-weight sense and auto-balancing
- Unparalleled safety
- Fast, responsive and precise
- **Low carbon footprint**



STANDARD MODELS		LA80		LA160		LA250	
Gross capacity (including lifting tool)	kg	80	110*	160	210*	250	310*
Vertical stroke	mm	1752	1752	1716	1716	1451	1451
Arm length	mm	2700	2700	2700	2700	2605	2605
Offset handling: max. distance from the lifting tool Z axis	mm	300	-	300	-	500	-
Uncovered area	mm	907	907	935	935	900	900
Rotation around column axis	degrees	360°					
Rotation around tool axis	degrees	550°					
Air pressure min.	bar	6.5					
Power supply	V-AC Hz	115/230 50/60					
Power consumption max	VA	100					
Enclosure protection	IP	54					

*With counterweights and reinforcement for arm.





PN Series

Traditional Industrial Manipulators

PN Series are traditional industrial manipulators featuring **full pneumatic operation**.

It is suitable for handling offset and/or very heavy loads.

PN units can be supplied either column, ceiling or overhead rail mounted.

Main features

- **Reliable**


Continuous product development using standard modules and components for improved safety and efficiency.

- **Safe**

Equipped with safety devices that maintain the grip on the load, even in the event of a total air loss. It is not possible to release the load when it is fully supported by the machine. When the control handle is released, a full set of brakes lock the machine and prevent further movement

- **Versatile**

It can be equipped with a wide range of bespoke tools operated pneumatically by grip or vacuum. Simple mechanical tools can also be used.

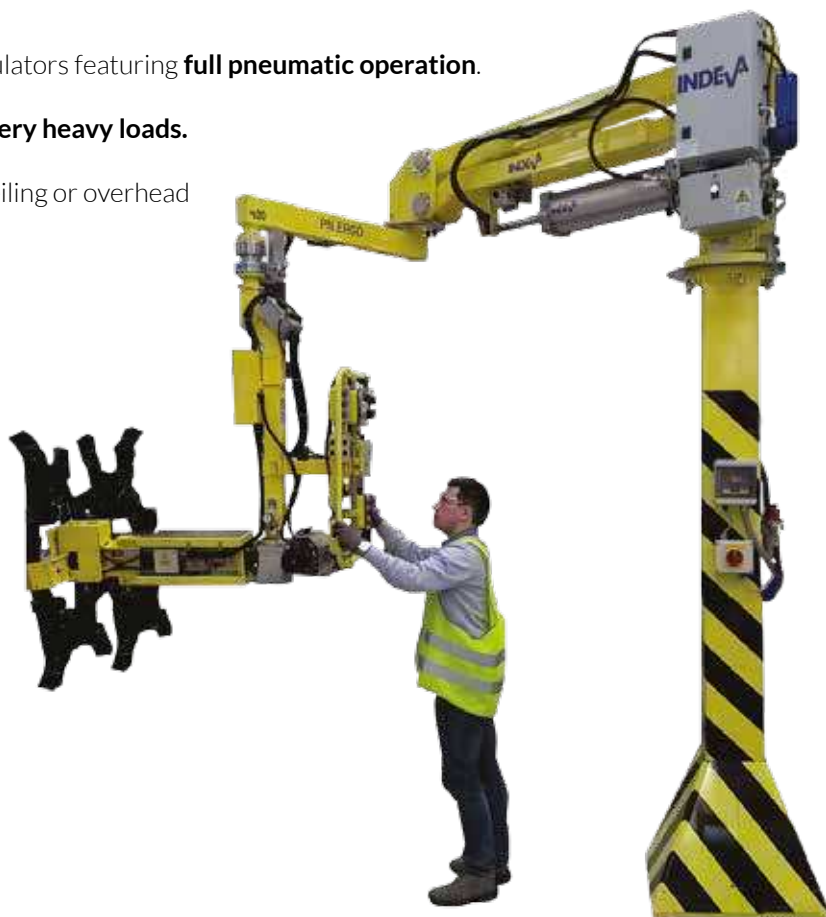

STANDARD MODELS		PN ERGO					
		PN80		PN160		PN250	
Gross capacity (including lifting tool)	kg	80	110*	160	210*	250	310*
Vertical stroke	mm	1752	1752	1716	1716	1451	1451
Arm length	mm	2700	2700	2700	2700	2605	2605
Offset handling: max. distance from the lifting tool Z axis	mm	300	-	300	-	500	-
Uncovered area	mm	907	907	935	935	900	900
Rotation around column axis	degrees	continuous					
Rotation around tool axis	degrees	standard: 550 optional: continuous					
Air pressure min.	bar	6.5					

*With counterweights and reinforcement for arm.



PN Series



PN Ergo




PN Compatto



PN Flex





PN Zip

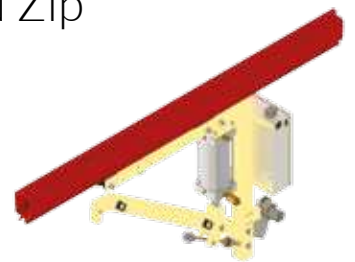

Industry fields

- AGRICULTURE
- AEROSPACE
- AUTOMOTIVE
- BATHROOM AND TOILETWARE
- CERAMIC
- CHEMICALS/
PHARMACEUTICALS
- ELECTRO-MECHANICAL
- ELECTRONICS
- FOOD/DRINK/TOBACCO
- FOUNDRY
- FURNITURE
- GLASS
- HOUSEHOLD ELECTRIC
APPLIANCES
- MECHANICS
- METAL WIRES
- MOTORCYCLES
- PAPER PRODUCTION
- RUBBER/PLASTICS
- TEXTILE
- TYRES

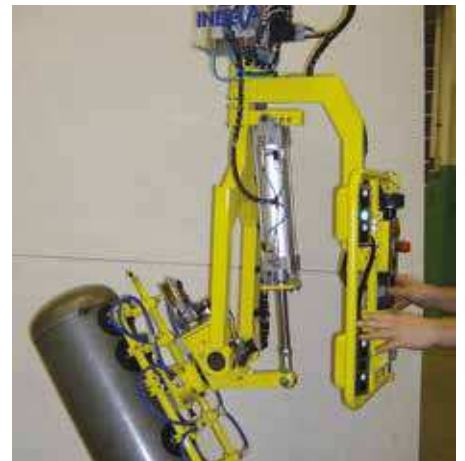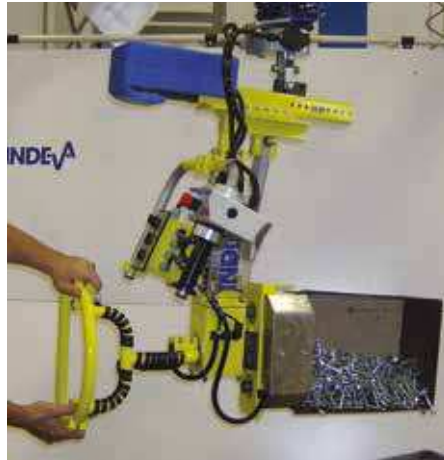





ERGO HANDLERS
India

ERGO HANDLERS
23, Kamet Society; 88 Rambag Colony,
Paud Road - Kothrud. PUNE - 411038
Tel. +91 744 742 5802/ 01
info@ergohandlers.co.in
www.ergohandlers.co.in



Scaglia INDEVA
Italy

Scaglia INDEVA SpA
Via Marconi, 42
24012 Val Brembilla (BG)
Tel. +39 0345 59 411
Fax +39 0345 59 500
info@it.indevagroup.com
www.indevagroup.it



Scaglia INDEVA
Germany

Scaglia INDEVA GmbH
Esslinger Str. 26
D-73249 Wernau
Tel.+49 (0) 7153 55049-0
Fax +49 (0) 7153 55049-69
info@de.indevagroup.com
www.indevagroup.de



Scaglia INDEVA
France

Scaglia INDEVA SARL
215 Rue Henry Barbusse
95100 Argenteuil
Tel.: +33 (0) 1 39 19 30 30
Fax: +33 (0) 1 39 19 63 24
info@fr.indevagroup.com
www.indevagroup.fr



Scaglia INDEVA
United Kingdom

Scaglia INDEVA Ltd
Coney Green Business Centre, Clay Cross
Chesterfield, Derbyshire S45 9JW
Tel. +44 (0) 1246 25 23 33
Fax +44 (0) 1246 25 23 34
info@uk.indevagroup.com
www.indevagroup.co.uk



Scaglia INDEVA
Sweden

SCAGLIA INDEVA Nordic AB
Torbornavägen 24
253 68 Helsingborg
Tel. +46 (0) 424002460
info@se.indevagroup.com
www.indevagroup.se



SIT INDEVA
United States

S.I.T. INDEVA Inc.
3630 Green Park Circle
Charlotte, NC 28217
Tel. +1 704 357 8811
Fax +1 704 357 8866
info@sit-indeva.com
www.indevagroup.com



SIT INDEVA
P. R. of China

SIT INDEVA (Shanghai) Ltd
Shanghai Nanhui Industrial Park
#2 Building, No 269 YuanZhong Rd. 201300
Tel. +86 (21) 5108 2206 - 107
Fax +86(21) 6486 3511
info@cn.indevagroup.com
www.indevagroup.cn

